
Technical Data

aczel®
...Since 1986

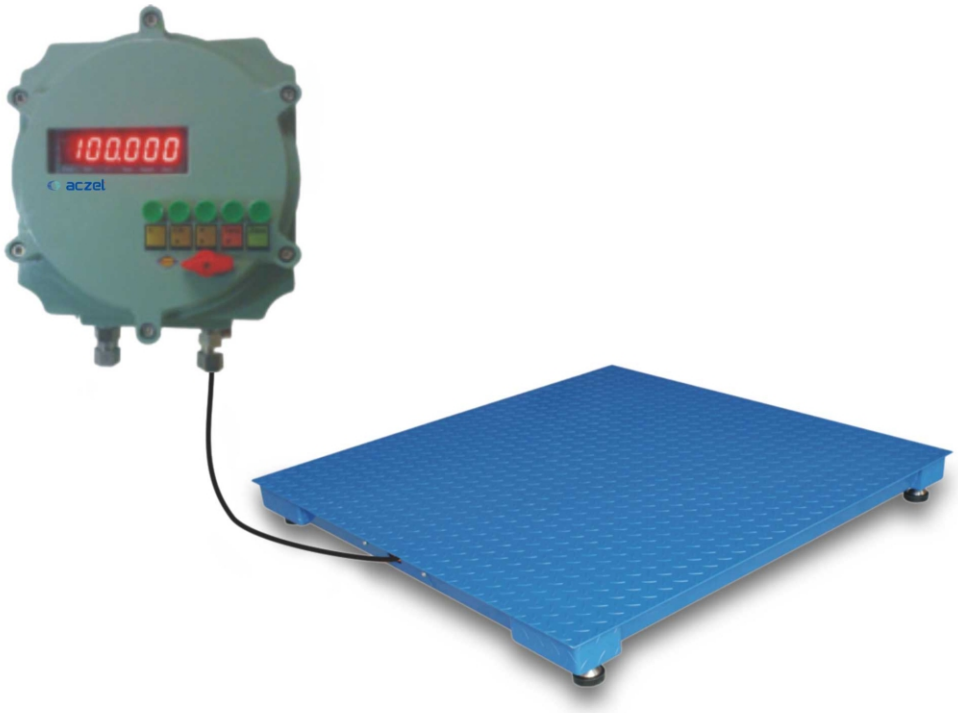

Scales CTG-F Series are designed for operation in Ex zones 1 and 2 of mixtures of exlosive vapours, gasses and fogs with air which also constitute for exlosive group IIB and temperature class T6.

Standard Features
- High resolution up to 15,000 counts.
- Easy to read (0.56") Bright LED display.
- Environmentally protected load cell.
- Rugged construction suitable for industrial environment.
- All models are certified by CIMFR (Dhanbad) for use in Hazardous areas.
- MS Chequred Plate

Group :
Intrinsically safe for use in zone 1&2 and Group IIB atmosphere with temperature Class T6 as per IS /IEC 60079-11:2006.

Indicator
IP 66k Protection Class.

Display
- 0.56" Bright RED LED display.

Power Supply
- AC 230V + 10%, 50-60Hz

Four Load Cell Flame Proof Scale

CTG-F Series

Model	CTG 1T4 LF	CTG 2T4 LF	CTG 3T4 LF	CTG 3T4 LF 5	CTG 5T4 LF	CTG 5T4 LF 2
Capacity	1 Ton	2 Ton	3 Ton	3 Ton	5 Ton	5 Ton
Readability	200 gm	500 gm	500 gm	1 kg	1 kg	1 kg
Pan Size (mm)	1000 x 1000	1200 x 1200		1500 x 1500		2000 x 2000
Display	RED LED Display,7 Segment					
Power Supply	AC 230V + 10%, 50-60Hz					